


# MSE PERC 72

High Power PERC Module

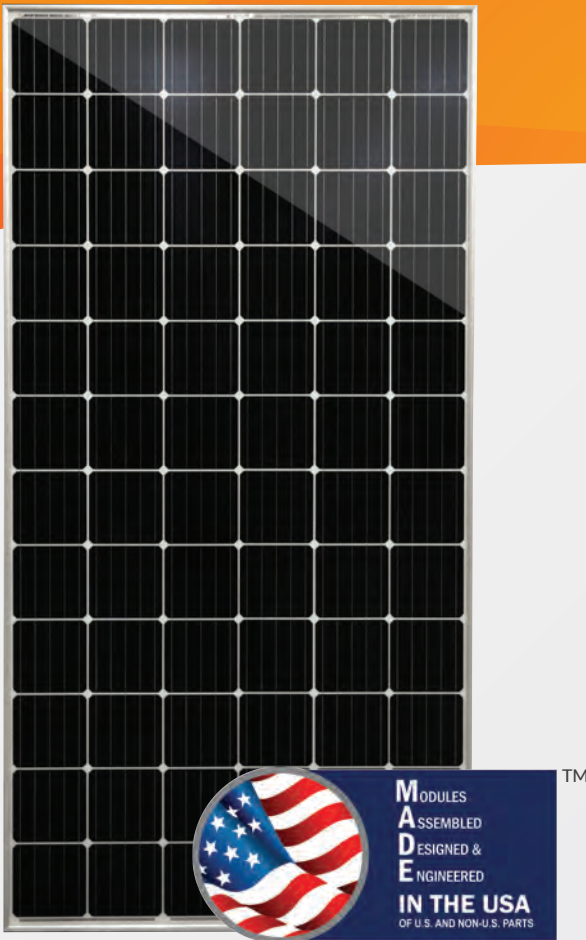

## 365-375W

CLASS LEADING POWER OUTPUT

## 18.89%

MAXIMUM EFFICIENCY

## -0~+3%

POSITIVE POWER TOLERANCE

### High-Power, American Quality

Mission Solar Energy is headquartered in San Antonio, TX with module facilities onsite. We produce American quality products ensuring the highest power output and reliability to our customers. Our product line is well suited for residential, commercial and utility applications. Every Mission Solar Energy product is certified and surpasses industry standard regulations, proving excellent performance over the long-term.



#### CERTIFIED RELIABILITY

- › Tested to 3X IEC Standards
- › PID Resistant



#### ADVANCED TECHNOLOGY

- › PERC and 5 busbar drive >18% module efficiency
- › Ideal for all applications



#### EXTREME WEATHER RESILIENCE

- › 5600 Pa snow load (117 psf)
- › 175 mph wind rating



#### BAA COMPLIANT FOR GOVERNMENT PROJECTS


- › Buy American Act
- › American Recovery & Reinvestment Act

25-YEAR

LINEAR WARRANTY

12-YEAR

PRODUCT WARRANTY

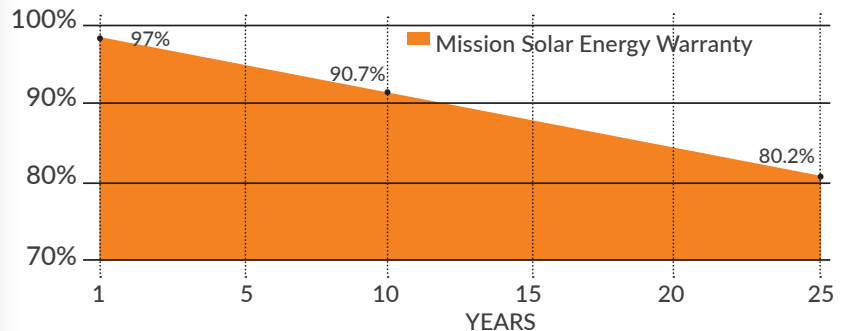

#### CERTIFICATIONS

IEC 61215/ IEC 61730/ IEC 61701 UL 1703



\*As there are different certification requirements in different markets, please contact your local Mission Solar Energy sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

MISSION SOLAR  
ENERGY



## ELECTRICAL SPECIFICATIONS

Electrical Parameters at Standard Test Conditions (STC)

| Module Type           |                  |                | MSE365SQ9S | MSE370SQ9S | MSE375SQ9S |
|-----------------------|------------------|----------------|------------|------------|------------|
| Power Output          | P <sub>max</sub> | W <sub>p</sub> | 365        | 370        | 375        |
| Module Efficiency     |                  | %              | 18.39      | 18.60      | 18.89      |
| Tolerance             |                  |                | 0~+3%      | 0~+3%      | 0~+3%      |
| Short-Circuit Current | I <sub>sc</sub>  | A              | 9.705      | 9.767      | 9.826      |
| Open Circuit Voltage  | V <sub>oc</sub>  | V              | 48.05      | 48.08      | 48.16      |
| Rated Current         | I <sub>mp</sub>  | A              | 9.236      | 9.323      | 9.432      |
| Rated Voltage         | V <sub>mp</sub>  | V              | 39.52      | 39.59      | 39.76      |
| Fuse Rating           |                  |                | 20         | 20         | 20         |

## TEMPERATURE COEFFICIENTS

|                                             |             |
|---------------------------------------------|-------------|
| Normal Operating Cell Temperature (NOCT)    | 44°C (±2°C) |
| Temperature Coefficient of P <sub>max</sub> | -0.377%/°C  |
| Temperature Coefficient of V <sub>oc</sub>  | -0.280%/°C  |
| Temperature Coefficient of I <sub>sc</sub>  | 0.046%/°C   |

## OPERATING CONDITIONS

|                                 |                                |
|---------------------------------|--------------------------------|
| Maximum System Voltage          | 1,500VDC                       |
| Operating Temperature Range     | -40°C (-40°F) to +90°C (194°F) |
| Maximum Series Fuse Rating      | 20A                            |
| Fire Safety Classification      | Type 1, Class C                |
| Front & Back Load (UL standard) | 5600 Pa (117 psf)              |
| Hail Safety Impact Velocity     | 25mm at 23 m/s                 |

## MECHANICAL DATA

|                  |                                                                  |
|------------------|------------------------------------------------------------------|
| Solar Cells      | P-type Mono-crystalline Silicon (156.75mm)                       |
| Cell orientation | 72 cells (6x12), 5 busbar                                        |
| Module dimension | 1987mm x 999mm x 40mm<br>(78.23 in. x 39.33 in. x 1.57 in.)      |
| Weight           | 21.6 kg (47.6 lb)                                                |
| Front Glass      | 3.2mm (0.126 in.) tempered,<br>Low-iron, Anti-reflective coating |
| Frame            | Anodized aluminum alloy                                          |
| Encapsulant      | Ethylene vinyl acetate (EVA)                                     |
| J-Box            | Protection class IP67 with 3 bypass-diodes                       |
| Cables           | PV wire, 1.2m (47.24 in.), 4mm <sup>2</sup> / 12 AWG             |
| Connector        | MC4 or compatible                                                |

## SHIPPING INFORMATION

| Container FT |              | Pallets | Panels    | 360 W     |               |
|--------------|--------------|---------|-----------|-----------|---------------|
| 53'          | Double stack | 30      | 780       | 280.80 kW |               |
| 40'          | Double stack | 24      | 624       | 224.64 kW |               |
|              |              | Panels  | Weight    | Height    | Width Length  |
| Pallet       |              | 26      | 1,400 lbs | 45.15"    | 45.00" 78.50" |

## CERTIFICATIONS &amp; TESTS

IEC


61215 / 61730 / 61701, Salt mist

UL

UL 1703 listed




CEC

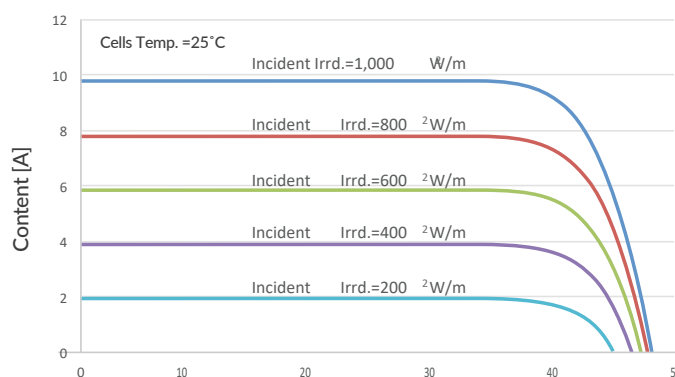MSE375SQ9S: 375WP, 72CELL SOLAR MODULE  
CURRENT-VOLTAGE CURVE

Current-voltage characteristics with dependence on irradiance and module temperature

## BASIC DESIGN (UNITS: mm)

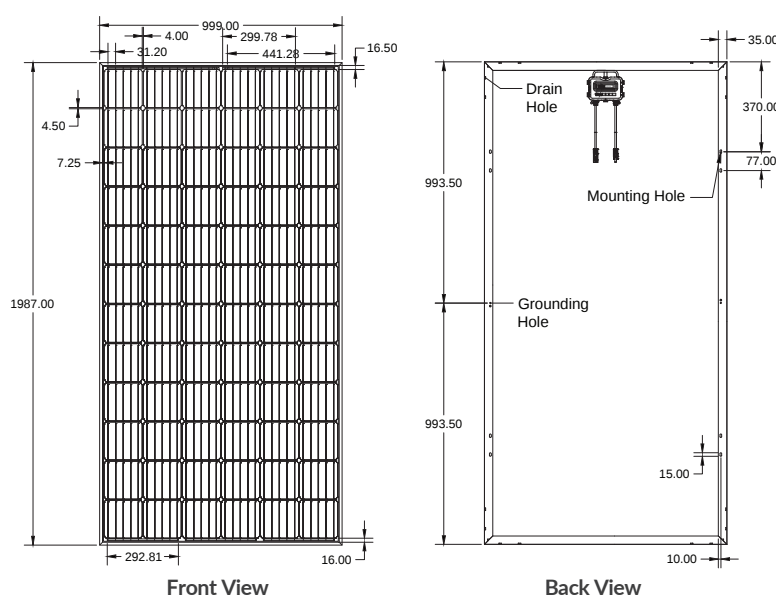MISSION SOLAR  
ENERGY